

# ASCENT X<sup>1</sup>



16-X1

CELLULAR TELEPHONE ENTRY SYSTEM WITH KEYPAD

## FEATURES

- Full cellular connectivity
- HD video calling with IR for low light
- Time/use-limited QR-code quick access
- Control up to 2 gates/doors
- 2 Wiegand inputs
- Up to 10,000 app, text, and voice users\*
- Up to 10,000 keypad codes\*
- Rollover calling—up to 3 phone numbers
- Broadcast calling—up to 10 phone numbers
- Push and/or email event and status notifications
- Cloud-based access control management
- LED downlight and LED-backlit buttons



\* Maximum number is dependent on plan.

powered by  **SUMMIT CONTROL**  
SIERRA

GET THE SUMMIT CONTROL SIERRA APP



## VERSATILE AND CONVENIENT

Control your gate or door from anywhere using a computer, tablet, or phone.

## AN ASCENT WITH A VIEW

Enjoy crisp HD video with IR, giving you clear visual ID while you have a conversation with your guests, even in low light.

## POWERFULLY EXPANDABLE

Network multiple Ascent units together and manage multiple entries via Summit Control.

## GET CONNECTED EVERY TIME

Assign multiple phone numbers to be called in order or simultaneously upon call button press, ensuring a connection is always made.



## SPECIFICATIONS

### PHYSICAL

Dimensions	6.68"(H) x 10.00"(W) x 5.25"(D)
Shipping Weight	8 lbs.

### ELECTRICAL

Input	12–24 VAC/DC 12-VDC power supply included (PS-12DC1)
Current Draw	less than 330 mA @ 12 VDC less than 160 mA @ 24 VDC with relays latched and LED components on

### RELAY

Contact Rating	10 A @ 120 VAC / 24 VDC
Max Switching Voltage	250 VAC / 30 VDC
Max Switching Current	15 A
Max Switching Power	240 W / 2,770 VA

### COMMUNICATION








Cellular Network	4G LTE
------------------	--------


### ENVIRONMENTAL

Operating Temperature	-15 to 158 °F
-----------------------	---------------

## CONTROL IT YOUR WAY

2<sup>DOOR</sup>

-  APP
-  TEXT
-  VOICE
-  KEYPAD\*
-  CALL BUTTON
-  WIEGAND DEVICES
-  QR CODE

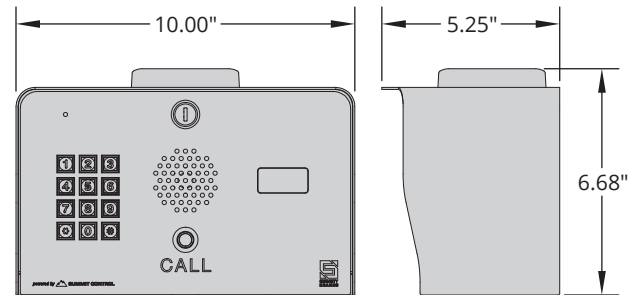

Hole pattern on back for pedestal mounting is spaced at 3.063" with pilot holes for alternate mounting at 2.5".

⚠ Actual voltage should be no more than 10% beyond specified range. Use of the included 12-VDC power supply is recommended.

## GET STARTED NOW!

### PAY JUST ONE BILL!\*

Unit includes a SIM card preinstalled and ready for activation.

**We do ALL the legwork for you!**



**SUMMIT CONTROL**

**visit [summitcontrol.com](https://summitcontrol.com)**



\* Because keypad codes are managed via Summit Control, they cannot be added or deleted without an active service plan.

† Monthly bill covers cost of SIM card, actions gateway, servers, maintenance, development, mobile app, admin portal, and tech support.

For more information, visit us online:  
**[securitybrandsinc.com](https://securitybrandsinc.com)**



**SECURITY BRANDS INC™**